

DescriptionProcess and Device5      for Continuously Drying Protein-containing Sludge

10      The invention relates to a process and a device for  
continuously drying protein-containing sludge, in  
particular sewage sludge, in a fluidised bed through  
which a drying gas flows, wherein partially de-watered  
sludge is added to the fluidised bed in granulate form  
and dried sludge is removed therefrom, respectively  
15      comprising a drying container having a lower receiving  
chamber for the drying gas and a gas-permeable support  
for the fluidised bed, means for feeding the partially  
de-watered sludge and means for withdrawing the dried  
sludge, with the feeding means including granulating  
means.

20      Sludges of the type in question are present e.g. in  
purification plants for communal or industrial sewage  
including at least one biological treatment stage, in  
paper manufacture or e.g. in the form of oil sludge and  
25      as a general rule presenting a solid content of 2 to  
5%. By means of mechanical preliminary desiccation, the  
solid content is mostly raised to 20 to 30%. For  
subsequent use, e.g. dumping, as an aggregate, as a  
fuel or as a fertiliser, further drying is required. In  
30      most cases storability and sufficient grindability are  
demanded which are attained only at solid contents  
exceeding 90% which render the dried sewage sludge  
biologically stable. Particularly when used as a  
fertiliser, a grain size varying only within the narrow  
35      range corresponding to the one of mineral fertilisers  
is demanded, such that the dried sludge may be spread

in the fields without any modification of available machinery.

It is known from DE 39 02 446 C1 to introduce  
5 sewage sludge into an indirectly heated, fluidised sand  
bed for drying. In this process the sludge is pre-dried  
such as to comprise a residual water content of approx.  
40%. At this water content it is still suited for  
pumping while, on the other hand, having passed through  
10 the so-called "sticky" phase inherently presenting the  
risk of the material adhering to itself and to the  
housing even prior to its introduction into the sand  
bed. It is a drawback of this process that the sewage  
sludge is altogether comminuted into dust during drying  
15 in the sand bed.

From DE 42 42 747 A1, a process for fluidised-bed  
drying of sludge in the absence of dry foreign matter  
such as sand is known. The violent frictional motions  
20 of particles in the fluidised bed result in abraded  
particles which are present in the form of fines. In  
this known process, approx. 90% of the dried sludge are  
again admixed to the partially de-watered sludge prior  
to drying. This serves to rapidly pass through the so-  
25 called "sticky" phase occurring at a content of solids  
of approx. 40 to 60% during the drying process.

A drawback of this process resides in the low  
efficiency as only approx. 10%, respectively, of the  
30 dried sludge can be withdrawn, and in the high  
proportion of fines having particle diameters of up to  
500  $\mu\text{m}$ , which proportion may constitute up to 20% of  
the total mass of the dried sludge in this process.  
Furthermore, in the absence of additional precautions,  
35 there is a risk of spontaneous combustion with

atmospheric oxygen and of dust explosions owing to the high proportion of fines.

From DE 29 43 558 A1 there is finally known a  
5 process for processing sewage sludge, wherein sewage  
sludge preliminarily de-watered by mechanical means is  
granulated and dried in a moving-bed dryer. For  
granulation of the sludge preliminarily de-watered by  
mechanical means, i.e. a dried granulate is admixed in  
10 the mixing granulator. The mixed granulate thus  
produced already includes a relatively high content of  
dry substances and has therefore, upon entering into  
the fluidised bed, already left the "sticky" phase. By  
providing the sludge in granulate form, i.e. in the  
15 form of a multiplicity of granules, a large particle  
surface and thus good heat transfer from the drying gas  
is achieved. This fundamentally allows for efficient  
utilisation of the input energy.

20 The efficiency of this process is, however,  
relatively low owing to recycling or admixture,  
respectively, of dry substances.

It is an object of the invention to furnish a  
25 process and a device of the type indicated in the  
introduction for drying protein-containing sludge, in  
particular sewage sludge, whereby the addition of  
foreign matter in the fluidised bed as well as  
recycling of already dried sludge and dust into the  
30 process may be avoided, resulting in increased  
efficiency and lower energy consumption.

In terms of process technology, this object is  
attained by forming the granules without the addition  
35 of dried substances, and through the circumstance that

the granulating process is preferably combined with pressing; in terms of device technology it is achieved in that means for the admixture of dried substances are eliminated in the feeding means.

5

As a result, surprising phenomena may be utilised in the fluidised bed for drying sludge. Thus it was found that the granulate shape enables admission of the sticky phase into the drying container.

10

In this continuous process the fluidised bed contains granular particles throughout the various stages of drying. This allows for omitting the recycling of dried material inasmuch as a sufficient quantity of dried granular material for rapidly passing through the sticky phase is present in the drying container at all times. Due to mixing with the dried granular material, accelerated surface drying to a content of solids of more than 60% is achieved, such that the granular material is subject to the risk of adhering for only a short period.

It is another surprising advantage that a major proportion of the dust formed as a result of abrasion of already dried granular material is bound to the humid particles in the fluidised bed which are still in the sticky phase. This reduces the quantity of dust and efficiently prevents deposition of particles in the sticky phase on plant components as well as agglomeration thereof. This is particularly true if the drying gas is circulated without dust recovery, with dust recovery being performed only on the exhaust vapor exiting from the dryer.

Moreover the pressing of the granular materials concurrently performed with shaping by means of granulating means provided in the function of a granulator is of advantage. Hereby the granular material is given an initial stability which is advantageous for drying in the fluidised bed. There would otherwise exist the danger of the particles disintegrating in the fluidised bed, and further use of the granular materials would not be possible. The newly supplied particles are mixed by the inflow of drying gas with the already dried granules in the fluidised bed, and due to the resulting thorough mixing, the large particle surface and selection of a suitable drying gas, rapid drying or curing on the particle surface is achieved, resulting in the granular material maintaining a stable shape and the granules hardly adhering to each other.

As the granular material supplied to the fluidised bed includes a high water content of generally about 75%, the particles shrink during drying. Owing to the irregular shrinking engendered by rapid surface drying while the interior is still humid and owing to the various degrees of abrasion, an irregularly shaped dry granulate including cavities in which dust accumulates during drying is produced in the course of the drying process.

This considerably reduces the quantity of dust while precluding the risk of dust explosion in the absence of any additional measures.

Size and shape of the dried granular material may be influenced by using various types of granulators and by varying the operating parameters during grain

conformation. Hereby a narrow grain size distribution at grain diameters of a few millimeters and adaptation to the specific application and to customers' specifications are achieved, e.g. for use in fertiliser spreaders or for pressurised air injection in combustion facilities.

Where the granular material is supplied onto the fluidised bed by corresponding technical devices immediately following its conformation and by gravity, clotting of the grains and adhering to plant components may be avoided and good mixing with the particles already dried on the surface may be achieved.

Directly supplying the granular material below the surface of the fluidised bed ensures that the granular material is exposed to the drying process without delay.

Where a preliminary product for the granular material is used, e.g. in the form of notched rods, this allows for simplification of the shaping process and of the granulating means without impairing the quality of the final product.

By limiting the supplied granules to a particular range of diameters, i.e., realisation of a specific particle shape and size, the respective users' demands with respect to storability, transportability and applicability of the final product can be met.

Drying of the sludge to contents of solids of more than 90% guarantees biological stability of the final product.

Owing to the preferred use of superheated water vapor as the drying medium, the high specific thermal capacity thereof is made use of and very good heat transfer to the material to be dried is achieved. As a  
5 result, the sticky phase is passed through rapidly, energy input is utilised efficiently, and a lower energy consumption is achieved.

The expelled exhaust vapor may be condensed  
10 practically entirely, and the condensate may be supplied to the purification plant. As long as the water vapor temperature does not exceed a value of approx. 150°C, decomposition of the organic matter of the sewage sludge hardly takes place. The expelled  
15 exhaust vapor contains only small amounts of non-condensable gases in this case, so that only small amounts of exhaust gas have to be purified, or exhaust gas purification will be unnecessary under favorable circumstances.

20 The superheated water vapor moreover does not contain any oxygen and thus inherently precludes any danger of spontaneous combustion of the material to be dried and of dust explosion in the container.

25 As the temperature of the material to be dried is higher than the boiling temperature of water during the drying process, an environment in which any pathogenic germs possibly remaining in the sludge are destroyed is  
30 created in the effective range of the water vapor.

The process is started up by using an already dried granular material because a sludge only partially de-watered might adhere to itself and to the plant  
35 components and thus hamper build-up of a fluidised bed.

Utilisation of heat exchangers comprising  
respective heat exchanger surfaces in the fluidised bed  
permits efficient input of heat energy. This  
5 constitutes a considerable advantage as the superheated  
water vapor already transmits a considerable amount of  
energy to the granular material over the initial few  
centimeters of the fluidised bed.

10 Where saturated steam at preferably 5 to 25 bar  
pressure above atmospheric is used as a heating medium  
for the heat exchangers, transfer of a great amount of  
energy may be achieved at a relatively low throughput  
of heating medium.

15 A slight pressure above atmospheric in the drying  
plant prevents the intrusion of air through leaks.

A slight vacuum, on the other hand, prevents  
20 unpurified exhaust vapor from escaping from the drying  
plant.

It is another advantage of the process that owing  
to compression of the exhaust vapor expelled from the  
25 sludge by means of a corresponding compressor means and  
subsequent condensation at an elevated temperature in a  
heat exchanger, such as preferably the heat exchanger  
in the fluidised bed, evaporation energy of the  
expelled water may be recuperated as condensation heat  
30 and recycled into the drying process. This further  
reduces energy consumption.

An advantageous embodiment of the device may be  
realised by omitting admixing means for dry substances.  
35 Thus the expense in terms of device technology may be



reduced and control of the drying plant is simplified substantially.

5 Positioning the outlet range of the granulating means above the fluidised bed is advantageous inasmuch as the outlet opening is not affected by impinging particles in this case.

10 Positioning the outlet range of the granulating means within the fluidised bed has the result that the granular material is immediately exposed to the effect of the fluidised bed. Particles possibly adhered in the outlet range of the granulator will again detach concurrently with ongoing drying under the influence of  
15 already largely dried particles of the fluidised bed.

It is another advantage if a granulating means is used wherein shaping is combined with pressing. This serves to reduce the risk of agglomeration of the  
20 granulate in the granulator or during transport into the dryer, and in addition less external air is admitted into the dryer. Moreover the granular material upon its entrance into the fluidised bed already has essentially better dimensional stability than in the  
25 case of a granulating process without pressing, such as e.g. by rotating blades.

Where the drying container is designed to be pressure-tight, air is prevented from entering and  
30 unpurified exhaust vapor is prevented from escaping.

The invention shall be explained in detail in the following drawing by referring to embodiments. The single figure of the drawing shows a process flow chart  
35 for a drying plant in accordance with the invention.

A drying plant 1 comprises a raw sludge hopper 2, a drying device 3, a dust extraction plant 4 having the form of a cyclone, and a dried material hopper 5.

5

Partially de-watered sludge 6 is pumped by a raw sludge pump 7 from the raw sludge hopper 2 to the drying device 3, is dried there and conveyed to the dried substances hopper 5 via a worm conveyor 8 and a bucket conveyor 9. The dried sludge 10 is filled into a transport container 12 through a metering slide valve 11.

The drying device 3 comprises a drying container 13, feeding means 14, a blower 15, a heat exchanger 16 and withdrawing means 17.

The drying container 13 includes a lower receiving chamber 18 wherein a steam fluidised bed is established and maintained with the aid of the blower 15 with superheated water vapor as the drying gas. Above a gas-permeable bottom slab or support 19, a fluidised bed 20 is formed during operation, the surface 20a of which is indicated by a dot-dashed line, and in which the partially de-watered sludge 6 is dried.

The feeding means 14 includes granulating means 14a provided in the function of a granulator. Hereby a granular material 21 is formed and transferred to the fluidised bed 20 of the drying container 13 via an outlet range 22 of granulating means 14a.

The fluidised bed 20 includes granules in various stages of drying, which are surrounded, set into motion and thus dried by a flow of superheated water vapor.

The newly introduced granular material 21 mixes with the particles already present in the fluidised bed 20, the large number and high content of solids of which accelerates drying of the newly supplied particles.

5 Owing to their favorable formation at small particle sizes, good dimensional stability and a comparatively large surface are achieved.

The surface of the granular material 21 rapidly

10 dries under these circumstances and thus prevents clotting of the grains by rapidly passing through the "sticky phase" even though the interior of the particles has not yet overcome the sticky phase conditions. This produces a rigid exoskeleton with a

15 soft inside. In the course of the drying process the granular material will then dry completely to have a content of solids in excess of 90%. In the process, an irregularly shaped dry granulate including cavities is formed as the result of shrinkage and mutual abrasion

20 with other particles.

Owing to the rapid surface drying, the granular material essentially maintains its size predetermined by the conformation and dried, porous granular material

25 having a diameter of several millimeters is obtained.

The dust forming as a result of abrasion may deposit in part on the particles whose surface is still contained in the sticky phase, and in part into the

30 cavities of the granulate.

Inside the fluidised bed 20 the heat exchanger 16 is arranged which is supplied by a steam feeding means 23 with saturated steam pressurised to 5 to 25 bar

35 pressure above atmospheric and thereby heats the

fluidised bed 20. This serves to provide the superheated water vapor employed as a drying medium with energy in order to replenish the heat dissipated to the granular material 21 and thus maintain the function.

The superheated water vapor polluted as a result of the drying process, i.e., the so-called exhaust vapor, is discharged to the dust extraction plant 4 through an outlet 24 where the dust and fines contents are separated and recombined with the dried sludge 10 via a cellular wheel sluice 25. Via the blower 15 the purified exhaust vapor is again supplied to the drying device 3. The humidity supplied by the partially de-watered sludge 6 creates an excess of exhaust vapor which is supplied to a condensation and purification device 26 following dust extraction. This is where the exhaust vapor condenses, and the non-condensable contents are concurrently washed and - if necessary - further conveyed for deodorisation.

The dried sludge 10 is withdrawn through the withdrawing means 17 and via cellular wheel sluices 27, 28 and 29. By the worm conveyor 8 and the bucket conveyor 9 it is finally transferred to the dried material hopper 5.

In order to prevent condensation of water vapor inside the conduits serving for withdrawal from the fluidised bed 20 and from the dust extraction plant 4, these are thermally insulated and can be heated as far as the cellular wheel sluice 29. In order to preclude spontaneous combustion of the withdrawn, dried sludge, the worm conveyor 8 is cooled.

In accordance with another embodiment of the invention there exists another process variation which is particularly suited for sludges producing only small quantities of dust during drying. Other than in the  
5 above described process, not all of the exhaust vapor exiting from the dryer 3 at the outlet 24 is guided to the dust extraction plant 4, but only the excess exhaust vapor expelled from the material to be dried. The overwhelming part of the exhaust vapor exiting from  
10 the dryer 3 at the outlet 24 in turn serves the function of a fluidising medium for the fluidised bed and of a heat carrier and is directly taken back into the dryer by a blower 15 capable of conveying dust-laden exhaust vapor without performing dust extraction.  
15 In this process variation a considerably smaller-dimensioned dust extraction plant 4 is sufficient.

It is also possible to omit the dust extraction plant 4 and directly feed the excess, dust-laden  
20 exhaust vapor into the condensation and purification plant 26. In this plant 26 the exhaust vapor is condensed e.g. with the aid of injected cold water, and the dust is introduced into the condensate. The dust-laden condensate may then be introduced into the  
25 purification plant.

The dust extraction plant 4 is, however, required if it is desired to incorporate exhaust vapor compression, which is more favorable in terms of  
30 energy, into the plant because the exhaust vapor must be freed from dust prior to its entrance into the compressor.

It is evident from the above description that the  
35 invention allows for a multitude of modifications and

variations without exceeding the scope of the invention.

Thus e.g. the granular material 21 can be supplied  
5 onto the fluidised bed 20 by gravity. This requires the  
outlet range 22 of the granulating means 14a to be  
positioned above the surface 20a of the fluidised bed.  
In this case it is advantageous if the granular  
material 21 is distributed over the surface 20a of the  
10 fluidised bed in the course of its application, thus  
permitting introduction of a larger quantity and rapid  
surface drying of the particles.

The granular material 21 may, however, also be  
15 supplied directly into the fluidised bed 20, in which  
case the outlet range 22 of the granulating means 14a  
is positioned below the surface 20a of the fluidised  
bed. Particles possibly adhered in the outlet range of  
the granulating means may then again detach under the  
20 influence of already dried particles.

Instead of the granular material 21, the  
granulating means 14a may also produce a preliminary  
product thereof, e.g. having the form of notched rods.  
25 This provides the advantage that the rod may spread  
across the fluidised bed 20 to then break off at a  
certain overlap, drop into the fluidised bed and be  
distributed there. Good distribution of the granular  
material 21 on the fluidised bed 20 is thus obtained.

30

It is moreover possible to apply a slight pressure  
above atmospheric to the drying container 13 in order  
to prevent intrusion of air. By means of a slight  
vacuum pressure in the drying container 13 it is,

however, also possible to prevent unpurified exhaust vapor from escaping to the exterior.

In order to lower energy consumption, there is the  
5 option of integrating the energetically more favorable  
vapor compression into the plant. In this case the  
exhaust vapor expelled from the sewage sludge is not  
condensed in the condensation and purification device  
26 in accordance with the representation of the flow  
10 chart, but e.g. compressed by means of a screw-type  
compressor and condensed at an elevated temperature in  
a heat exchanger, e.g. the heat exchanger 16  
incorporated in the fluidised bed 20. Hereby a  
substantial part of the vaporisation heat of the  
15 expelled water is recycled into the drying process and  
energy consumption is reduced. The steam feeding means  
23 is, in a given case, also required for starting up  
the plant.

20

In order to reduce energy consumption it is  
moreover possible to perform drying in several stages.  
In such a case the first fluidised-bed drying process  
25 is performed at a high system pressure in the dryer.  
The exhaust vapor expelled in this first stage may then  
be conveyed for condensation into the heat exchanger of  
a fluidised bed dryer of the second stage having a  
similar construction wherein drying in accordance with  
30 the invention is performed at a lower pressure. This  
second stage may accordingly be followed by a third  
stage or, according to necessity, even more stages.

Claims

- 5 1. A process for continuously drying protein-  
containing sludge, in particular sewage sludge, in  
a fluidised bed (20) through which a drying gas  
flows, wherein partially de-watered sludge (6) is  
added to the fluidised bed (20) in granulate form  
10 (21) and dried sludge (10) is removed therefrom,  
  
characterised in that  
  
the granules are formed without the addition of  
15 dried substances and the granulating process is  
preferably combined with pressing.
2. The process according to claim 1, characterised in  
that the granular material (21) or a preliminary  
20 product thereof is applied onto the fluidised bed  
(20) immediately following its production and by  
gravity.
3. The process according to claim 1, characterised in  
25 that the granular material (21) or a preliminary  
product thereof is introduced directly into the  
fluidised bed (20) below the surface (20a) thereof.
4. The process according to any one of claims 1 to 3,  
30 characterised in that the applied granules (21) are  
used while having an average diameter in the range  
of 1 to 10 mm, preferably 3 to 7 mm, in particular  
about 5 mm.
- 35 5. The process according to any one of claims 1 to 4,  
characterised in that the partially de-watered



sludge (6) is dried to have a dry substances content of at least 90% of the mass of the dried product.

5 6. The process according to any one of claims 1 to 5, characterised in that superheated water vapor is used as a drying gas.

10 7. The process according to any one of claims 1 to 6, characterised in that process start-up is carried out by using a fluidised bed (20) of already dried sludge (10) in granulate form.

15 8. The process according to any one of claims 1 to 7, characterised in that the fluidised bed (20) is heated by means of a heat exchanger (16).

20 9. The process according to claim 8, characterised in that saturated steam having a pressure above atmospheric of preferably 5 to 25 bar is used as a heating medium for the heat exchanger (16).

25 10. The process according to any one of claims 1 to 9, characterised in that drying is performed at a pressure slightly above atmospheric pressure.

30 11. The process according to any one of claims 1 to 9, characterised in that drying is performed at a pressure slightly below atmospheric pressure.

12. The process according to any one of claims 1 to 11, characterised in that the exhaust vapor expelled from the dried sludge (10) is compressed and condensed under the pressure elevated as a result

of compression, preferably in the heat exchanger (16) accommodated in the fluidised bed (20).

5       **13.** A device for continuously drying protein-containing sludge, in particular sewage sludge, in a fluidised bed (20), comprising

10           a drying container (13) which includes a lower receiving chamber (18) for drying gas and a gas-permeable support (19) for the fluidised bed (20),

          means (14) for feeding the partially de-watered sludge (6)

15           and means (17) for withdrawing the dried sludge (10),

20           said feeding means (14) including granulating means (14a),

**characterised in that**

25           said feeding means (14) do not include means for admixing dried substances.

30       **14.** The device according to claim 13, characterised in that the outlet range (22) of the granulating means (14a) is positioned adjacent to, or inside, the peripheral wall of the drying container (13) and above the means (19) supporting the fluidised bed (20).

35       **15.** The device according to claim 14, characterised in that the outlet range (22) of the granulating means (14a) is positioned above the surface of the fluidised bed (20a).

16. The device according to claim 14, characterised in that the outlet range (22) of the granulating means (14a) is positioned below the surface (20a) of the fluidised bed.
- 5
17. The device according to any one of claims 13 to 16, characterised in that the granulating means (14a) are adapted to form a preliminary product of the granular material (21), e.g. having the form of
- 10 notched rods.
18. The device according to any one of claims 13 to 17, characterised in that the granulating means (14a) subject the granules to pressing forces during the
- 15 granulating process.
19. The device according to any one of claims 13 to 18, characterised in that the applied granules (21) present average diameters in the range of 1 to
- 20 10 mm, preferably 3 to 7 mm, in particular about 5 mm.
20. The device according to any one of claims 13 to 19, characterised in that at least one heat exchanger
- 25 (16) is present in the fluidised bed (20) and includes heat exchanger surfaces onto which the material of the fluidised bed (20) may be applied.
21. The device according to any one of claims 13 to 20,
- 30 characterised in that the drying container (13) is adapted to be pressure-tight.
22. The device according to any one of claims 13 to 21, characterised by means containing a compressor and

a condenser, for heat recuperation of the heat energy contained in the expelled exhaust vapor.

RECEIVED  
JAN 11 1964  
U.S. AIR FORCE  
RECEIVED


Abstract

5

**Process and Device  
for Continuously Drying Protein-containing Sludge**

10 A process and a device for continuously drying  
protein-containing sludge, in particular sewage sludge,  
in a fluidised bed (20) inside a drying container (13).  
A drying gas flows through the fluidised bed (20) while  
partially de-watered sludge (6) in granulate form (21)  
15 is added to the fluidised bed (20) while dried sludge  
(10) is withdrawn therefrom. The granules (21) are  
formed without admixture of dried substances and are  
granulated preferably at the same time as they are  
pressed. Sewage sludge may thus be dried without  
20 admixture or recycling of dried substances, so that a  
highly efficient plant is obtained. In addition, a  
granulated dry material is produced which may be used  
in various ways.

1/1

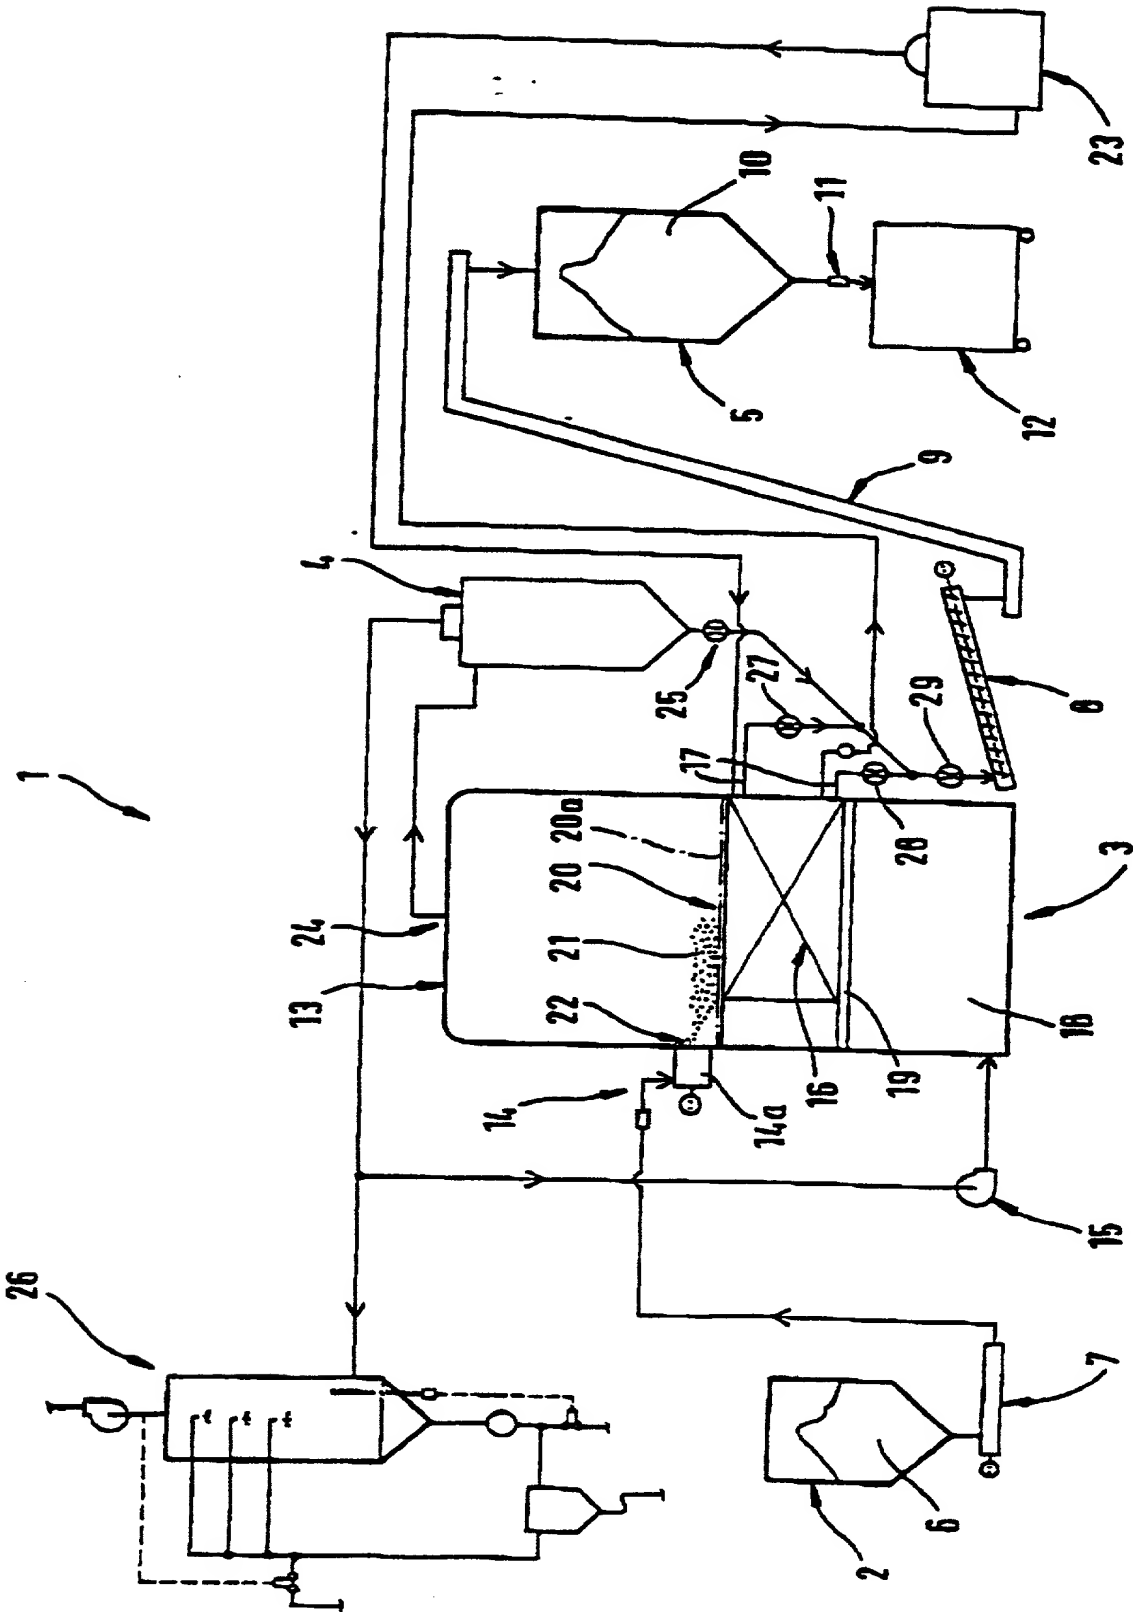

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:

# COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

ATTORNEY DOCKET NO.

2170-109P

As a below named inventor, I hereby declare that: my residence post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: \* PROCESS AND DEVICE FOR CONTINUOUSLY DRYING PROTEIN-CONTAINING SLUDGE

Insert Title

Check Box If  
Appropriate —  
For Use Without  
Specification  
Attached

the specification of which is attached hereto unless one of the following boxes is checked:

- ☐ The Specification was filed on \_\_\_\_\_ and was assigned  
Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_  
☒ was filed as PCT international application number PCT/EP96/02633 on  
June 18, 1996 and was amended under PCT Article 19 on \_\_\_\_\_  
(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows:

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below:

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Country	Application No.	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status — patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

RECEIVED  
01 MAY 1998

Legal Staff  
International Division

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

RAYMOND C. STEWART (Reg. No. 21,066)  
JOSEPH A. KOLASCH (Reg. No. 22,463)  
JAMES M. SLATTERY (Reg. No. 28,380)  
DONALD C. KOLASCH (Reg. No. 23,038)  
CHARLES GORENSTEIN (Reg. No. 29,271)  
LEONARD R. SVENSSON (Reg. No. 30,330)  
MARC S. WEINER (Reg. No. 32,181)

TERRELL C. BIRCH (Reg. No. 19,382)  
ANTHONY L. BIRCH (Reg. No. 26,122)  
BERNARD L. SWEENEY (Reg. No. 24,448)  
MICHAEL K. MUTTER (Reg. No. 29,680)  
GERALD M. MURPHY, JR. (Reg. No. 28,977)  
TERRY L. CLARK (Reg. No. 32,644)  
ANDREW D. MEIKLE (Reg. No. 32,868)

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:

Send Correspondence to: **BIRCH, STEWART, KOLASCH AND BIRCH**

P.O. Box 747

Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000

Facsimile: (703) 205-8050

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole  
Inventor:  
Insert Name of Inventor  
Insert Date This  
Document is Signed  
Insert Residence  
Insert Citizenship

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
Peter	GAISER	<i>[Signature]</i>	March 9, 1998
RESIDENCE (City, State & Country)		CITIZENSHIP	
Rotschwaigestr. 10, DE-80997 München GERMANY		German	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

Insert Post Office  
Address

Full Name of Second  
Inventor, if any;  
see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
Dieter	KOWALCZYK	<i>[Signature]</i>	
RESIDENCE (City, State & Country)		CITIZENSHIP	
Blumenstr. 1, DE-83075 Bad Feilnbach GERMANY		German	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

Full Name of Third  
Inventor, if any;  
see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
Ulrich	PLANTIKOW	<i>[Signature]</i>	March 9, 1998
RESIDENCE (City, State & Country)		CITIZENSHIP	
Lipowskystr. 20, DE-81373 München GERMANY		German	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

Full Name of Fourth  
Inventor, if any;  
see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
Dieter	KOWALCZYK	<i>[Signature]</i>	March 9, 1998
RESIDENCE (City, State & Country)		CITIZENSHIP	
Nolgarden 4558, Tidavädd, S-54293 MARIESTAD, Sweden		German	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			


Full Name of Fifth  
Inventor, if any;  
see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

\*Note: Must be completed  
— date this document is  
signed.



United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

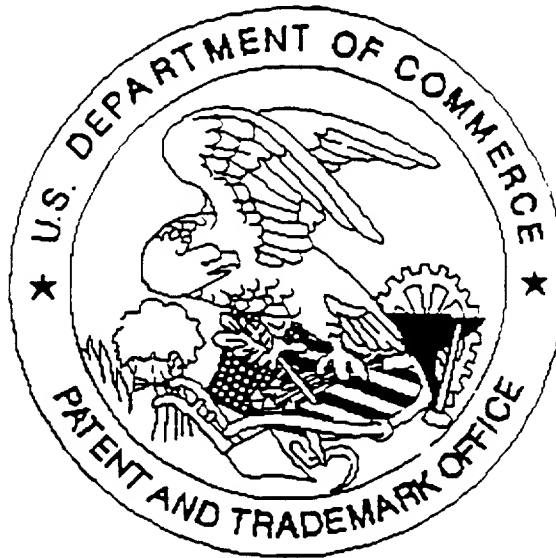

Application deficiencies were found during scanning:

☒ Page(s) \_\_\_\_\_ of Transmittal were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.

SCANNED # 18